


Blowers & Vents

Bilge Blowers

- 2870 In-line TMC 2,800 Litres per minute. 12V 3Amp 75mm
- 2870A Rule In-line 6,300 Litres per minute. 12V 4.3Amp 100mm
- 2871 Standard TMC 2,800 Litres per minute. 12V 3Amp 75mm
- 2872 Flexible bilge blower hose 75mm X 3Mtrs
- 2872A Flexible bilge blower hose 100mm X 3Mtrs

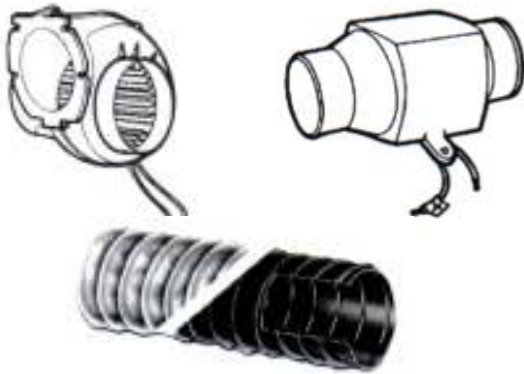


“Hurricane” Ventilator

- 2704C In all weather, air enters freely - toxic & explosive gases are removed. Even if the decks are awash NO solid water can leak in. No sharp edges to snag rope.



“Seabird” Ventilator

- 2704 The “seabird” ventilator gives a large airflow, either intake or exhaust, while remaining waterproof.

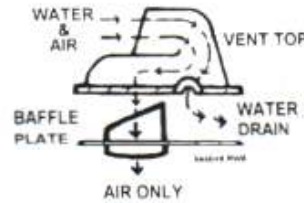


Stainless Steel Solar Vent

- 2704D Solar powered low profile exhaust vent that's weatherproof. Works in natural daylight. No wiring or running costs.



Stainless Steel Louvred Vents

- 2704B 6 Louvre 304 grade S/S 127mm X 115mm
- 2704E 2 X 6 Louvre 304 grade S/S 227mm X 115mm
- 2704F 5 Raised “V” louvres in 304 grade. 300mm X 90mm

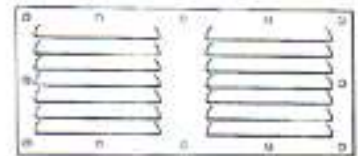

Cover/Ventilation Scoop

- 2702 S/S 40mm Clam Vent
- 2703 S/S 53mm Clam Vent
- 2704A White nylon

